


# タイ・フレックス® (TF-80W) GX形

FCD製 伸縮可とう管

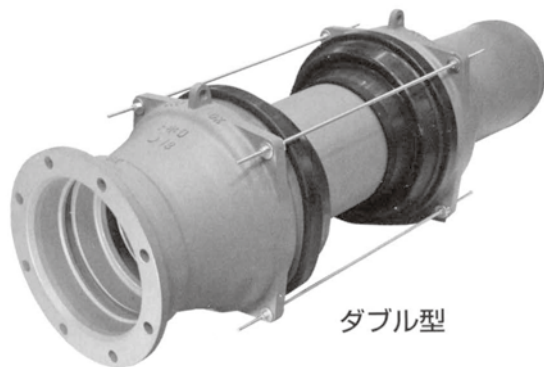

ダブル型


離脱防止性能 A級  
(3DkN 以上)  
ノンボルトで軽量・コンパクト

呼び径	接合形式	価格 (円)			
		偏心量100mm	偏心量200mm	偏心量300mm	偏心量400mm
75	F×U	411,000	466,000	521,000	576,000
	F×S	371,000	426,000	481,000	536,000
	U×U	560,000	615,000	670,000	725,000
	U×S	520,000	575,000	630,000	685,000
	S×S	480,000	535,000	590,000	645,000
100	F×U	496,000	568,000	640,000	712,000
	F×S	453,000	525,000	597,000	669,000
	U×U	660,000	732,000	804,000	876,000
	U×S	617,000	689,000	761,000	833,000
	S×S	574,000	646,000	718,000	790,000
150	F×U	670,000	778,000	886,000	994,000
	F×S	620,000	728,000	836,000	944,000
	U×U	846,000	954,000	1,062,000	1,170,000
	U×S	796,000	904,000	1,012,000	1,120,000
	S×S	746,000	854,000	962,000	1,070,000
200	F×U	827,000	974,000	1,121,000	1,268,000
	F×S	801,000	948,000	1,095,000	1,242,000
	U×U	1,038,000	1,185,000	1,332,000	1,479,000
	U×S	1,012,000	1,159,000	1,306,000	1,453,000
	S×S	986,000	1,133,000	1,280,000	1,427,000
250	F×U	1,037,000	1,220,000	1,403,000	1,586,000
	F×S	981,000	1,164,000	1,347,000	1,530,000
	U×U	1,304,000	1,487,000	1,670,000	1,853,000
	U×S	1,248,000	1,431,000	1,614,000	1,797,000
	S×S	1,192,000	1,375,000	1,558,000	1,741,000
300	F×U	1,205,000	1,425,000	1,645,000	1,865,000
	F×S	1,122,000	1,342,000	1,562,000	1,782,000
	U×U	1,544,000	1,764,000	1,984,000	2,204,000
	U×S	1,461,000	1,681,000	1,901,000	2,121,000
	S×S	1,378,000	1,598,000	1,818,000	2,038,000
400	F×U	1,886,000	2,180,000	2,474,000	2,768,000
	F×S	1,736,000	2,030,000	2,324,000	2,618,000
	U×U	2,338,000	2,632,000	2,926,000	3,220,000
	U×S	2,188,000	2,482,000	2,776,000	3,070,000
	S×S	2,038,000	2,332,000	2,626,000	2,920,000

F=フランジ、U=受口 (GX形)、S=挿し口 (GX形)

※上記価格には適合用附属品は含んでおりません。

# タイ・フレックス® (TF-80W) GX形

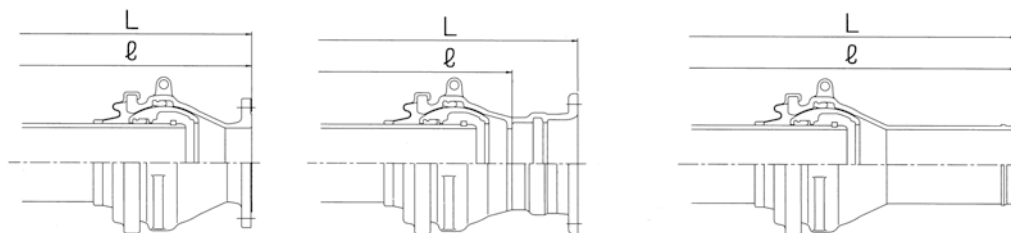

L = 面間寸法  
ℓ = 有効長

呼び径	接合形式	寸法 (mm)							
		偏心量100mm		偏心量200mm		偏心量300mm		偏心量400mm	
		L	ℓ	L	ℓ	L	ℓ	L	ℓ
75	F×U	667	530	937	800	1,217	1,080	1,487	1,350
	F×S	820	820	1,090	1,090	1,370	1,370	1,640	1,640
	U×U	723	450	1,003	730	1,273	1,000	1,553	1,280
	U×S	877	740	1,157	1,020	1,427	1,290	1,707	1,570
	S×S	1,030	1,030	1,310	1,310	1,580	1,580	1,860	1,860
100	F×U	708	570	998	860	1,288	1,150	1,578	1,440
	F×S	860	860	1,150	1,150	1,440	1,440	1,730	1,730
	U×U	775	500	1,065	790	1,355	1,080	1,645	1,370
	U×S	928	790	1,218	1,080	1,508	1,370	1,798	1,660
	S×S	1,070	1,070	1,360	1,360	1,650	1,650	1,940	1,940
150	F×U	762	620	1,072	930	1,382	1,240	1,692	1,550
	F×S	910	910	1,220	1,220	1,530	1,530	1,840	1,840
	U×U	844	560	1,154	870	1,454	1,170	1,764	1,480
	U×S	992	850	1,302	1,160	1,602	1,460	1,912	1,770
	S×S	1,140	1,140	1,440	1,440	1,750	1,750	2,060	2,060
200	F×U	824	680	1,154	1,010	1,474	1,330	1,804	1,660
	F×S	990	990	1,320	1,320	1,640	1,640	1,970	1,970
	U×U	888	600	1,218	930	1,548	1,260	1,868	1,580
	U×S	1,054	910	1,384	1,240	1,714	1,570	2,034	1,890
	S×S	1,220	1,220	1,550	1,550	1,880	1,880	2,210	2,210
250	F×U	875	730	1,225	1,080	1,575	1,430	1,915	1,770
	F×S	1,040	1,040	1,390	1,390	1,740	1,740	2,090	2,090
	U×U	940	650	1,290	1,000	1,640	1,350	1,990	1,700
	U×S	1,105	960	1,455	1,310	1,805	1,660	2,155	2,010
	S×S	1,280	1,280	1,620	1,620	1,970	1,970	2,320	2,320
300	F×U	940	790	1,320	1,170	1,690	1,540	2,060	1,910
	F×S	1,170	1,170	1,550	1,550	1,920	1,920	2,290	2,290
	U×U	1,020	720	1,390	1,090	1,770	1,470	2,140	1,840
	U×S	1,250	1,100	1,630	1,480	2,000	1,850	2,370	2,220
	S×S	1,480	1,480	1,860	1,860	2,230	2,230	2,600	2,600
400	F×U	1,232	1,080	1,512	1,360	1,882	1,730	2,262	2,110
	F×S	1,460	1,460	1,740	1,740	2,120	2,120	2,490	2,490
	U×U	1,314	1,010	1,594	1,290	1,964	1,660	2,344	2,040
	U×S	1,552	1,400	1,832	1,680	2,202	2,050	2,582	2,430
	S×S	1,780	1,780	2,060	2,060	2,440	2,440	2,810	2,810

※L=面間寸法、ℓ=有効長は、7.5K・10Kフランジ仕様の寸法です。  
16K・20Kフランジ仕様のL、ℓはお問い合わせ願います。